

PV™ 100

A unique multi-layer composite pre-applied waterproofing membrane that bonds integrally to poured concrete



Product Description

PV™ 100 pre-applied waterproofing membrane is a multi-layer composite waterproofing material with superior performance, including a layer of high-performance PE film, self-adhesive polymer layer and a unique particulate layer.


PV 100 pre-applied waterproofing membrane can be applied on a smooth level concrete surface, qualified compacted sand-stone cushion, or used as the waterproof layer of vertical surfaces of temporary and adjacent structures. After pouring concrete directly on to the paved PV 100 preapplied waterproofing membrane, the poured concrete will bond fully and permanently with PV 100 pre-applied waterproofing membrane.

PV 100 pre-applied waterproofing membrane protects concrete foundation against aggressive ground contaminants and is suitable for water and vapour-proofing for all basement grades.

PV 100 pre-applied waterproofing membrane is supplied at a width of 1.0m. Pour concrete after the steel bars are tied up. Please contact your local GCP representative for application details.

Product Advantages

- Forms permanent bond to concrete poured against it.
- Not affected by the displacement of the basal layer/ ground settlement beneath slabs
- Membrane is self-protecting. It can be trafficked immediately after application and does not require the use of protective layer
- Simple and quick to install, requiring no priming or fillets
- Unaffected by wet conditions
- Fully-adhered watertight dual laps with self-adhesive strip and detailing
- Excellent bonding even under long-term water immersion

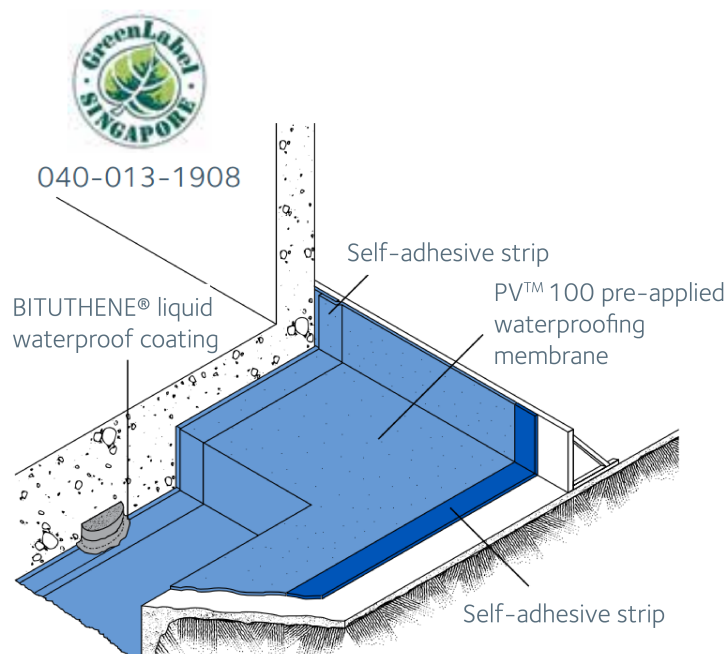

Installation

Substrate Preparation

All Surfaces

It is essential to create a sound and solid substrate to eliminate movement during the concrete pour. Substrates must be regular and smooth with no gaps or voids greater than 12mm.

HYDRODUCT® drainage composites can provide the membrane with a good surface and facilitate underground structural drainage.

Horizontal Blinding

The substrate must be free of loose aggregate and sharp protrusions. Avoid curved or rounded substrates. The surface does not need to be dry, but standing water must be removed.

Vertical Sheet Piling

Use concrete, or 19mm thick plywood, insulation or other approved facing to sheet piling to provide support for the membrane. Board systems such as timber lagging must be close butted to provide support and not more than 12mm out of alignment.

Membrane Installation

When placing PV 100 pre-applied waterproofing membrane, overlap the bonding edge. Use a steel roller to press the bonding edge firmly to ensure complete bonding and to achieve continuity. PV 100 pre-applied waterproofing membrane can be applied at -4°C and above. When installing PV 100 waterproofing membrane in cold or marginal weather, the bonding edge may be heated appropriately with hot air gun or similar devices to remove moisture in order to enhance bonding.

PV 100 Waterproofing Membrane

Place the membrane PE film side to the substrate with particulate layer side up, facing the concrete pour. End laps should be staggered to avoid build up of layers. Accurately position succeeding sheets to overlap the previous sheet 75mm along the marked selvedge. Ensure the underside of the succeeding sheet is clean, dry and free from contamination before attempting to overlap. Ensure a continuous bond is achieved without creases and roll firmly with a heavy roller. Any initial tack will quickly disappear.

Roll Ends and Cut Edges

Overlap all roll ends and cut edges by a minimum 75mm and ensure the area is clean and free from contamination, wiping with a damp cloth if necessary.

PV100 membrane has self-adhesive strips at the top and bottom of the seam area on the edge of the roll. Remove the liner of 2 strips and adhere them together, a strong adhesive to adhesive bond is achieved in the overlap area. Roll firmly to ensure complete adhesion without creases or voids.

Application with BITUTHENE® Membrane and Joints

If PV 100 pre-applied waterproofing membrane is applied together with Bituthene membranes, or for areas such as construction joints, allow for another 300mm-wide overlap so as to protect PV 100 pre-applied waterproofing membrane from being contaminated. This 300mm-wide membrane can offer overlap with the follow-up waterproofing membrane that is installed.

Pouring of Concrete

The concrete must be poured within 21 days of application of the membrane. During pouring, take care when vibrating concrete to avoid damaging the waterproofing materials.


Formwork Removal

PV 100 pre-applied waterproofing membrane can be applied to removable formwork, such as slab perimeters, elevator and lift pits, etc. Once the concrete is poured the formwork must remain in place until the concrete has gained sufficient compressive strength to develop the surface bond. PV 100 pre-applied waterproofing membrane is not recommended for conventional twin-sided wall forming systems.


As a guide, to reach the minimum compressive strength stated above, a structural concrete mix with an ultimate strength of 40N / mm² will typically require a cure time of approximately six days at an average ambient temperature of -4°C, or two days at 21°C. Please contact your local GCP representative for more details.

Physical Properties


PROPERTY	TYPICAL VALUE	TEST METHOD
Colour	White	
Thickness	1.2 mm	ASTM D 3767
Tensile Strength, Film	27.6 Mpa	ASTM D 412 Modified
Elongation	400%	ASTM D 412 Modified
Low Temperature Flexibility	-25 °C, Pass	ASTM D 1970
Water Migration/Resistance to Hydrostatic Head	>60M	ASTM D 5385 Modified
Crack Cycling	Pass	ASTM D 836 / ASTM C 1305 Modified
Peel Adhesion to Concrete, No Treatment	880 N/m	ASTM D 903 Modified
Dimension Stability	< 1%	ASTM D 1204
Puncture Resistance	>800N	ASTM E 154

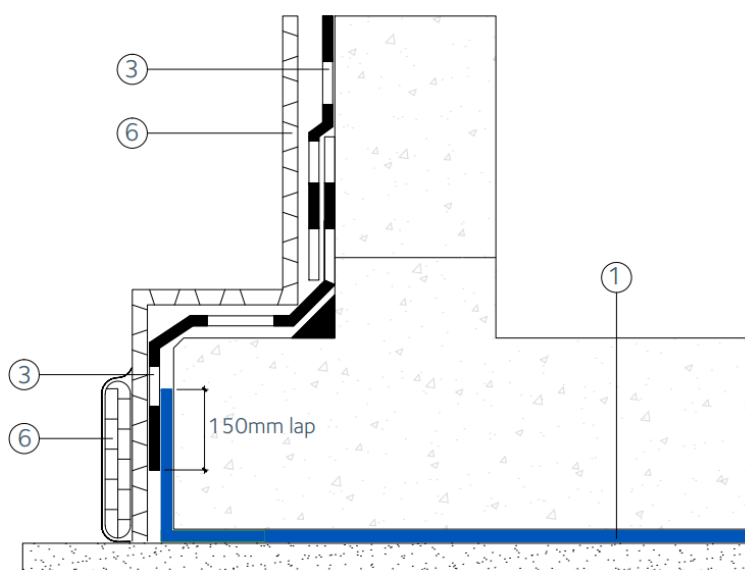

Details of foot of the wall foundation for drainage

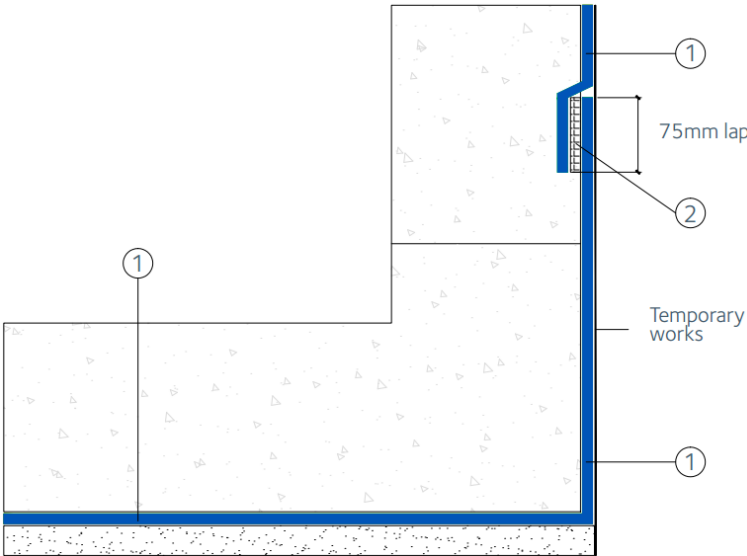


Details of wall foundation attached with temporary works

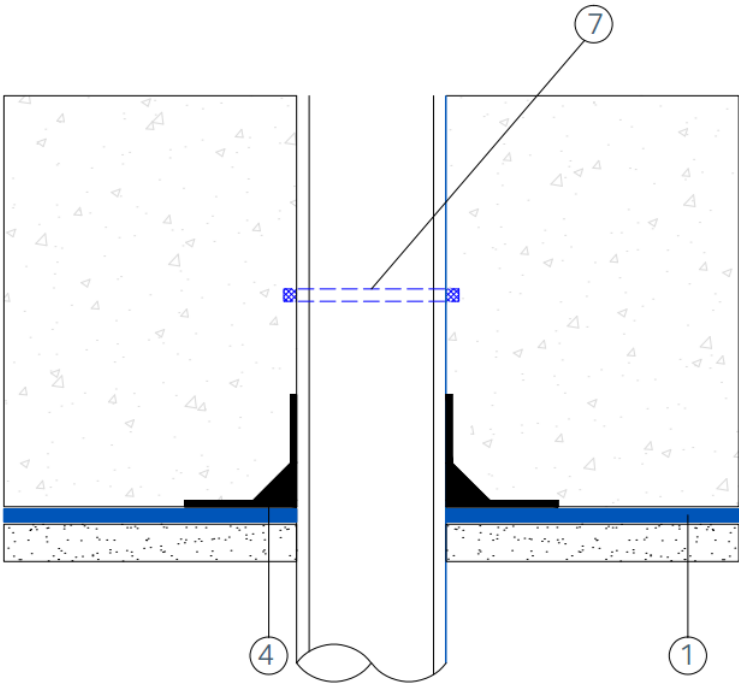

Pipe hole



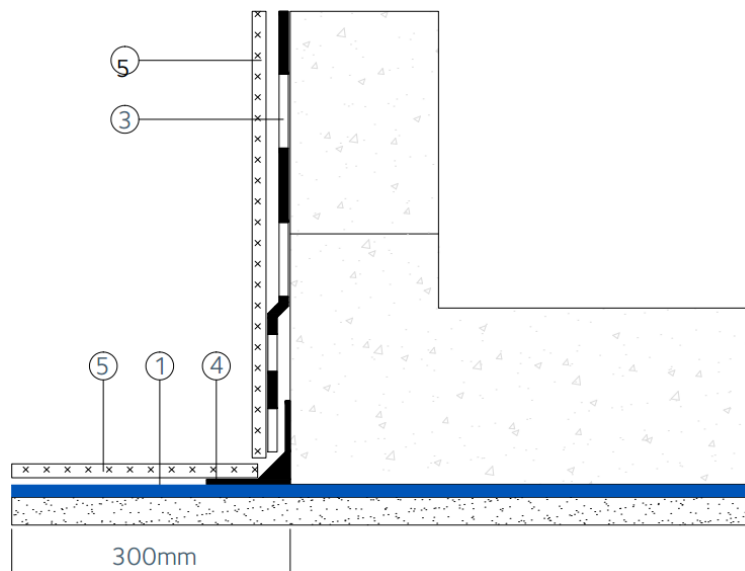

Details of wall foundation for replacement of earlier formwork stripping

1	PV™ 100 Pre-Applied Waterproofing Membrane	5	Protection Board
2	PV™ 100 Tape	6	HYDRODUCT® Drainage Sheet
3	BITUTHENE® Membrane	7	DE NEEF® SWELLSEAL®
4	BITUTHENE® Liquid Membrane	8	BETEC® M-5 Crystallisation

The above drawings are typical examples and not details of the works. For details or assistance, please contact GCP Technical Services.

Supply

Thickness	1.2mm
Roll size	1m x 25m
Roll area	25m ²
Roll weight	39 - 41kg
Edge/end laps	75mm

Health and Safety

Refer to relevant Safety Data Sheet. Complete rolls should be handled by a minimum of two persons.

Storage

Dry conditions below 40°C. Store indoors or under cover on pallets. Do not double stack pallets.

Technical Services

For assistance with working drawings for projects and additional technical advice, please contact GCP Applied technologies.

gcpat.vn | For technical information: asia.enq@gcpat.com

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

BETEC, BITUTHENE, DE NEEF, PV, HYDRODUCT and SWELLSEAL are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies, Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2024 GCP Applied Technologies, Inc. All rights reserved.

GCP Applied Technologies Inc., 2325 Lakeview Parkway, Alpharetta, GA 30009, USA

GCP Vietnam Company Ltd, Lot B14, Section B, Street No. 12, Xuan Thoi Son Small Scale Arts & Crafts Group, National Road 22Xuan Thoi Son Village, Hoc Mon District, Ho Chi Minh City

This document is only current as of the last updated date stated below and is valid only for use in Vietnam. It is important that you always refer to the currently available information at the URL below to provide the most current product information at the time of use. Additional literature such as Contractor Manuals, Technical Bulletins, Detail Drawings and detailing recommendations and other relevant documents are also available on www.gcpat.vn. Information found on other websites must not be relied upon, as they may not be up-to-date or applicable to the conditions in your location and we do not accept any responsibility for their content. If there are any conflicts or if you need more information, please contact GCP Customer Service.

Last Updated: 2025-05-15

gcpat.vn/solutions/products/pv-100